


Level Floor Aeration



Chief Industries UK Limited


The Chief level floor aeration range offers an extremely easy to install, cost effective and efficient way to aerate your silo.

Using trenches formed into the silo base, the aeration grids come in 1m long modules, allowing them to be easily slotted into place.

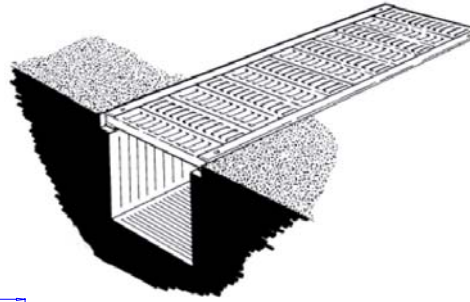


Types of Floor Aeration Grids

Slotted

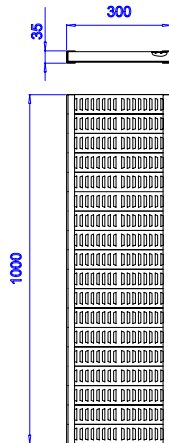

- 1m sections
- 11% Open Area
- 14 Tonne axle pressure

Perforated

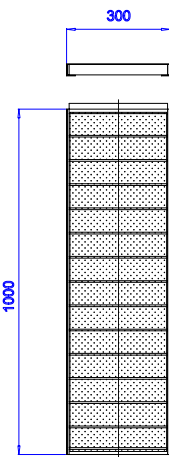

- 1m sections
- Available with:
- 2mm diameter holes (17% Open Area)
 - 1.5mm diameter holes (11% Open Area)
 - 10 Tonne axle pressure


- Both types offer maximum airflow and even air distribution.
- Slotted grids suitable for grain and vegetables.
- Perforated grids (1.5mm diameter holes) also suitable for rapeseed.

Chief level floor aeration also suitable for new and existing floor stores, offering the following advantages:

- Easy emptying
- Easy cleaning
- Drive-over floor, withstanding 14 tonnes of axle pressure
- Made from specially treated aluminium-zinc sheeting with a long service life.



Dimensions of Silo Trench

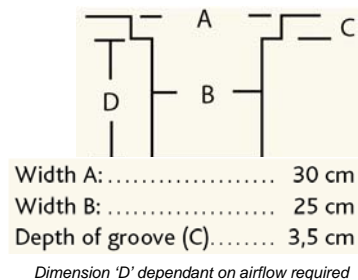

TECHNICAL DATA SHEET TDS-230



Chief Industries UK Limited
 Beckingham Business Park, Maldon, Essex. CM9 8LZ. ENGLAND
 Tel: 00 44 (0) 1621 868944 Fax: 00 44 (0) 1621 868955
 e-mail: info@chief.co.uk www.chief.co.uk

All capacities and dimensions are nominal. Due to our development policy prices and specification are subject to change without notice.

